




ALL ALUMINUM CONDUCTOR STEEL REINFORCED (ACSR) - ASTM B 232/B 232M-99


Code Name	Conductor Size	Sectional Area	Stranding		Wire diameter		Diameter of Complete Conductor	Conductor Weight	Rated Strength	DC Resistance @ 20°C	Current Capacity	
			No. of Wires								@ 75°C	@ 85°C
			AL	Steel	AL	Steel					@ 75°C	@ 85°C
	(kcmil)	(mm²)	(No.)	(No.)	(mm)	(mm)	(mm)	(Kg/km)	KN	(Ω/Km)	(Ampere)	(Ampere)
Thrasher	2312	1235.10	76	19	4.43	2.07	45.77	3754	252.3	0.0248	937	1245
Kiwi	2167	1145.70	72	7	4.41	2.94	44.07	3424	221.6	0.0264	907	1200
Bluebird	2156	1181.30	84	19	4.07	2.44	44.75	3732	268.3	0.0266	910	1205
Chukar	1780	975.90	84	19	3.70	2.22	40.69	3083	226.9	0.0322	827	1084
Falcon	1590	907.90	54	19	4.36	2.62	39.24	3038	242.5	0.0360	774	1010
Lapwing	1590	861.60	45	7	4.78	3.18	38.20	2664	187.8	0.0358	772	1005
Parrot	1510.5	861.80	54	19	4.25	2.55	38.23	2884	230.1	0.0379	753	980
Nuthatch	1510.5	818.20	45	7	4.65	3.10	37.24	2530	178.4	0.0377	752	976
Plover	1431	817.10	54	19	4.14	2.48	37.21	2735	218.5	0.0400	732	950
Bobolink	1431	775.00	45	7	4.53	3.02	36.25	2397	170.4	0.0398	730	946
Martin	1351.5	771.50	54	19	4.02	2.41	36.17	2582	206.0	0.0424	710	919
Dipper	1351.5	732.10	45	7	4.40	2.93	35.20	2582	161.1	0.0422	709	916
Pheasant	1272	726.40	54	19	3.90	2.34	35.10	2431	194.0	0.0450	687	888
Bittern	1272	688.90	45	7	4.27	2.85	34.16	2131	151.7	0.0448	686	884
Skylark	1272	662.60	36	1	4.78	4.78	33.43	1914	117.5	0.0446	694	892
Grackle	1192.5	680.80	54	19	3.77	2.27	33.99	2278	186.5	0.0480	664	855



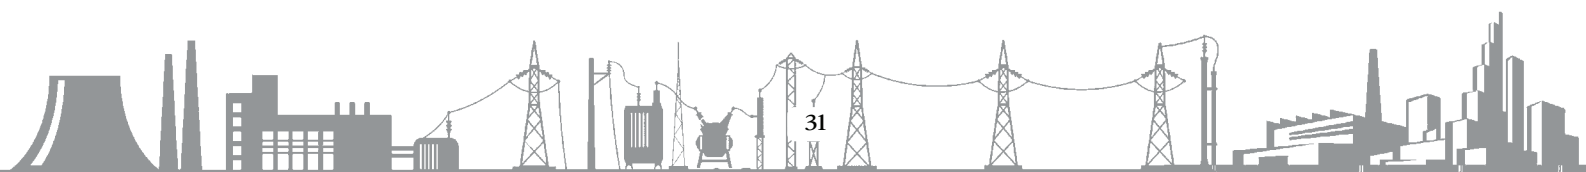

ALL ALUMINUM CONDUCTOR STEEL REINFORCED (ACSR) - ASTM B 232/B 232M-99


Code Name	Conductor Size	Sectional Area	Stranding		Wire diameter		Diameter of Complete Conductor	Conductor Weight	Rated Strength	DC Resistance @ 20°C	Current Capacity	
			No. of Wires								@ 75°C	@ 85°C
			AL	Steel	AL	Steel					@ 75°C	@ 85°C
	(kcmil)	(mm ²)	(No.)	(No.)	(mm)	(mm)	(mm)	(Kg/km)	KN	(Ω/Km)	(Ampere)	(Ampere)
Bunting	1192.5	646.10	45	7	4.14	2.76	33.07	1997	142.4	0.0478	663	852
Finch	1113	635.80	54	19	3.65	2.19	32.84	2128	174.0	0.0514	640	821
Bluejay	1113	603.20	45	7	4.00	2.66	31.98	1866	132.6	0.0512	639	819
Curlew	1033.5	591.20	54	7	3.51	3.51	31.62	1978	162.9	0.0552	615	788
Ortolan	1033.5	559.50	45	7	3.85	2.57	30.78	1731	123.3	0.0552	613	783
Tanager	1033.5	538.00	36	1	4.30	4.30	30.12	1553	95.2	0.0549	620	791
Cardinal	954	545.90	54	7	3.38	3.38	30.38	1826	150.4	0.0598	589	751
Rail	954	516.80	45	7	3.70	2.47	29.59	1598	115.3	0.0597	587	748
Catbird	954	496.90	36	1	4.14	4.14	28.96	1434	88.1	0.0594	594	755
Canary	900	515.20	54	7	3.28	3.28	29.51	1723	142.0	0.0633	571	726
Ruddy	900	487.40	45	7	3.59	2.40	28.73	1507	108.6	0.0633	568	722
Mallard	795	494.80	30	19	4.14	2.48	28.96	1836	170.9	0.0719	542	689
Condor	795	454.80	54	7	3.08	3.08	27.74	1521	125.5	0.0717	532	674
Tern	795	430.60	45	7	3.38	2.25	27.00	1332	98.3	0.0717	531	671
Drake	795	468.60	26	7	4.44	3.45	28.14	1626	140.2	0.0717	541	686
Cuckoo	795	455.00	24	7	4.62	3.08	27.74	1522	124.2	0.0717	540	684

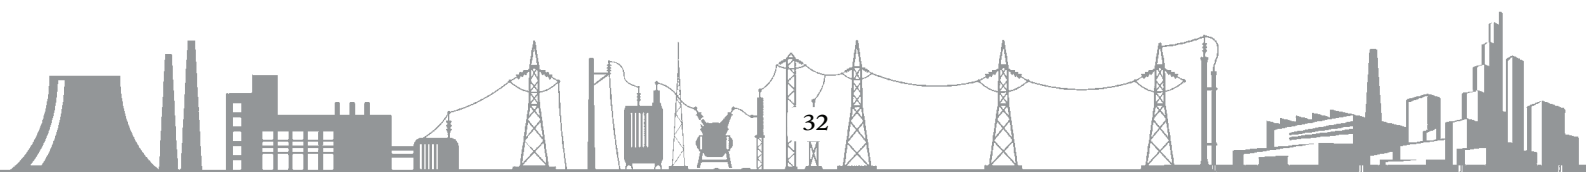



ALL ALUMINUM CONDUCTOR STEEL REINFORCED (ACSR) - ASTM B 232/B 232M-99

Code Name	Conductor Size	Sectional Area	Stranding		Wire diameter		Diameter of Complete Conductor	Conductor Weight	Rated Strength	DC Resistance @ 20°C	Current Capacity	
			No. of Wires								@ 75°C	@ 85°C
			AL	Steel	AL	Steel					@ 75°C	@ 85°C
	(kcmil)	(mm²)	(No.)	(No.)	(mm)	(mm)	(mm)	(Kg/km)	KN	(Ω/Km)	(Ampere)	(Ampere)
Coot	795	414.00	36	1	3.77	3.77	26.42	1196	74.8	0.0713	537	678
Redwing	715.5	444.90	30	19	3.92	2.35	27.46	1651	154.0	0.0799	511	647
Starling	715.5	421.60	26	7	4.21	3.28	26.70	1464	126.4	0.0796	510	644
Stilt	715.5	409.70	24	7	4.39	2.92	26.31	1370	113.5	0.0796	509	642
Gannet	666.6	392.70	26	7	4.07	3.16	25.76	1363	117.5	0.0855	490	617
Flamingo	666.6	381.70	24	7	4.23	2.82	25.40	1277	105.5	0.0855	489	616
Egret	636	395.80	30	19	3.70	2.22	25.88	1469	140.2	0.0898	479	603
Scoter	636	397.50	30	7	3.70	3.70	25.88	1481	135.3	0.0900	478	602
Grosbeak	636	374.70	26	7	3.97	3.09	25.15	1301	112.1	0.0900	476	599
Rook	636	364.10	24	7	4.14	2.76	24.82	1217	100.6	0.0896	476	599
Swift	636	331.10	36	1	3.38	3.38	23.62	956	61.4	0.0892	474	593
Kingbird	636	340.30	18	1	4.78	4.78	23.88	1027	69.9	0.0891	474	595
Teal	605	376.40	30	19	3.61	2.16	25.25	1397	133.5	0.0944	465	585
Wood Duck	605	378.00	30	7	3.61	3.61	25.25	1408	128.6	0.0944	465	585
Squab	605	356.30	26	7	3.87	3.01	24.54	1237	108.1	0.0943	464	582
Peacock	605	346.40	24	7	4.03	2.69	24.21	1159	96.1	0.0942	463	581
Eagle	556.5	347.80	30	7	3.46	3.46	24.21	1296	123.7	0.1027	444	557

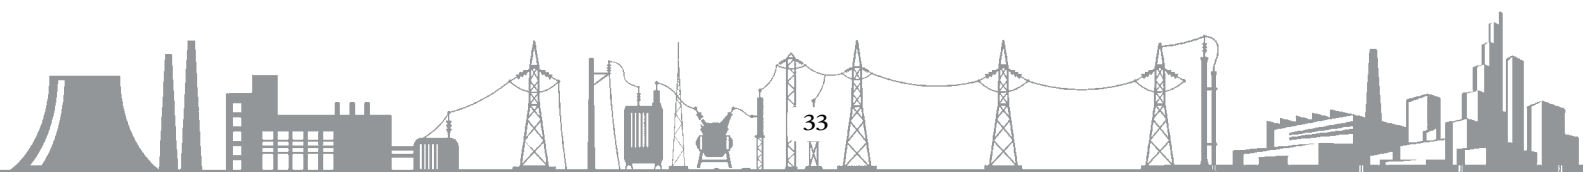



ALL ALUMINUM CONDUCTOR STEEL REINFORCED (ACSR) - ASTM B 232/B 232M-99


Code Name	Conductor Size	Sectional Area	Stranding		Wire diameter		Diameter of Complete Conductor	Conductor Weight	Rated Strength	DC Resistance @ 20°C	Current Capacity	
			No. of Wires								@ 75°C	@ 85°C
			AL	Steel	AL	Steel						
	(kcmil)	(mm ²)	(No.)	(No.)	(mm)	(mm)	(mm)	(Kg/km)	KN	(Ω/Km)	(Ampere)	(Ampere)
Dove	556.5	327.90	26	7	3.72	2.89	23.55	1139	100.6	0.1024	442	554
Parakeet	556.5	318.60	24	7	3.87	2.58	23.22	1066	88.1	0.1024	442	553
Osprey	556.5	297.50	18	1	4.47	4.47	22.33	898	61.0	0.1019	440	549
Hen	477	298.10	30	7	3.20	3.20	22.43	1111	105.9	0.1198	407	508
Hawk	477	280.90	26	7	3.44	2.67	21.79	975	86.8	0.1196	405	505
Flicker	477	273.10	24	7	3.58	2.39	21.49	913	76.5	0.1194	404	504
Pelican	477	255.20	18	1	4.14	4.14	20.68	770	52.5	0.1189	403	501
Lark	397.5	248.40	30	7	2.92	2.92	20.47	925	90.3	0.1437	366	455
Ibis	397.5	234.00	26	7	3.14	2.44	19.89	812	72.5	0.1435	365	452
Oriole	336.4	210.30	30	7	2.69	2.69	18.82	783	77.0	0.1698	333	411
Linnet	336.4	198.00	26	7	2.89	2.25	18.29	687	62.7	0.1696	331	409
Merlin	336.4	179.90	18	1	3.47	3.47	17.37	543	38.6	0.1686	330	406
Ostrich	300	176.70	26	7	2.73	2.12	17.27	613	56.5	0.1900	310	382
Partridge	266.8	157.20	26	7	2.57	2.00	16.31	546	50.3	0.2136	290	356
Waxwing	266.8	142.60	18	1	3.09	3.09	15.47	430	30.6	0.2127	288	352
Penguin	211.6	125.10	6	1	4.77	4.77	14.30	433	37.2	0.2667	237	289
Cochin	211.3	169.50	12	7	3.37	3.37	16.87	784	92.1	0.2697	242	298
Brahma	203.2	194.90	16	19	2.86	2.48	18.14	1004	126.4	0.2804	240	297





ALL ALUMINUM CONDUCTOR STEEL REINFORCED (ACSR) - ASTM B 232/B 232M-99


Code Name	Conductor Size	Sectional Area	Stranding		Wire diameter		Diameter of Complete Conductor	Conductor Weight	Rated Strength	DC Resistance @ 20°C	Current Capacity	
			No. of Wires								@ 75°C	@ 85°C
			AL	Steel	AL	Steel					@ 75°C	@ 85°C
	(kcmil)	(mm²)	(No.)	(No.)	(mm)	(mm)	(mm)	(Kg/km)	KN	(Ω/Km)	(Ampere)	(Ampere)
Dorking	190.8	153.10	12	7	3.20	3.20	16.03	708	83.2	0.2987	228	280
Dotterel	176.9	141.90	12	7	3.08	3.08	15.42	656	77.0	0.3222	218	267
Pigeon	167.8	99.20	6	1	4.25	4.25	12.75	343	29.5	0.3364	207	251
Guinea	159	127.50	12	7	2.92	2.92	14.63	590	71.2	0.3585	205	251
Leghorn	134.6	108.00	12	7	2.69	2.69	13.46	499	60.5	0.4235	186	227
Quail	133.1	78.60	6	1	3.78	3.78	11.35	272	23.6	0.4242	180	218
Minorca	110.8	88.90	12	7	2.44	2.44	12.22	411	50.3	0.5142	166	201
Raven	105.6	62.50	6	1	3.37	3.37	10.11	216	19.5	0.5341	157	190
Petrel	101.8	81.70	12	7	2.34	2.34	11.71	378	46.3	0.5599	158	191
Robin	83.7	49.50	6	1	3.00	3.00	8.99	171	15.8	0.6743	137	164
Grouse	80	54.70	8	1	2.54	4.24	9.32	221	23.1	0.7089	135	162
Sparate	66.4	42.20	7	1	2.47	3.30	8.26	159	16.2	0.8498	120	144
Sparrow	66.4	39.30	6	1	2.67	2.67	8.03	136	12.7	0.8499	120	143
Swanate	41.7	26.50	7	1	1.96	2.61	6.53	100	10.5	1.3527	91	108
Swan	41.7	24.70	6	1	2.12	2.12	6.35	85	8.3	1.3522	91	107
Turkey	26.2	15.50	6	1	1.68	1.68	5.03	54	5.3	2.1526	68	81
Brant	397.5	227.50	24	7	3.27	2.18	19.61	761	65.0	0.1434	364	451
Chickadee	397.5	212.60	18	1	3.77	3.77	18.87	641	44.2	0.1427	363	449

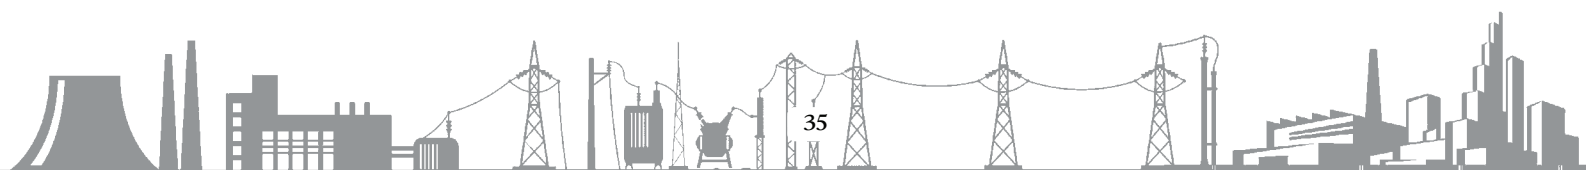



ALL ALUMINUM CONDUCTOR STEEL REINFORCED (ACSR) - ASTM B 232/B 232M-99

Code Name /Conductor Size	Sectional Area	Stranding		Wire diameter		Diameter of Complete Conductor	Conductor Weight	Rated Strength	DC Resistance @ 20°C	Current Capacity	
		No. of Wires								@ 75°C	@ 85°C
		AL	Steel	AL	Steel					@ 75°C	@ 85°C
(kcmil)	(mm ²)	(No.)	(No.)	(mm)	(mm)	(mm)	(Kg/km)	KN	(Ω/Km)	(Ampere)	(Ampere)
2466.9	1250	84	19	4.35	2.61	47.85	4274	306.0	0.0232	969	1295
2466.9	1250	76	19	4.58	2.14	47.34	4023	269.0	0.0232	967	1290
2466.9	1250	72	7	4.70	3.13	46.99	3901	250.0	0.0232	964	1285
2210.4	1120	84	19	4.12	2.47	45.31	3833	275.0	0.0259	921	1221
2210.4	1120	76	19	4.33	2.02	44.74	3595	240.0	0.0259	917	1215
2210.4	1120	72	7	4.45	2.97	44.51	3499	226.0	0.0259	916	1213
1973.6	1000	84	19	3.89	2.33	42.77	3416	245.0	0.0291	870	1147
1973.6	1000	72	7	4.21	2.81	42.11	3132	202.0	0.0290	868	1142
1776.2	900	84	19	3.69	2.21	40.57	3073	226.0	0.0323	825	1082
1776.2	900	72	7	3.99	2.66	39.90	2812	181.0	0.0322	823	1076
1578.8	800	54	19	4.34	2.60	39.04	3015	240.0	0.0363	770	1005
1578.8	800	45	7	4.76	3.17	38.07	2652	186.0	0.0361	769	1002
1401.2	710	54	19	4.09	2.45	36.79	2678	213.0	0.0409	723	938
1401.2	710	45	7	4.48	2.99	35.85	2351	167.0	0.0407	722	935
1243.3	630	54	19	3.85	2.31	34.65	2375	189.0	0.0462	678	875
1243.3	630	45	7	4.22	2.81	33.75	2084	148.0	0.0459	678	872
1105.2	560	54	19	3.63	2.18	32.68	2112	173.0	0.0519	636	817

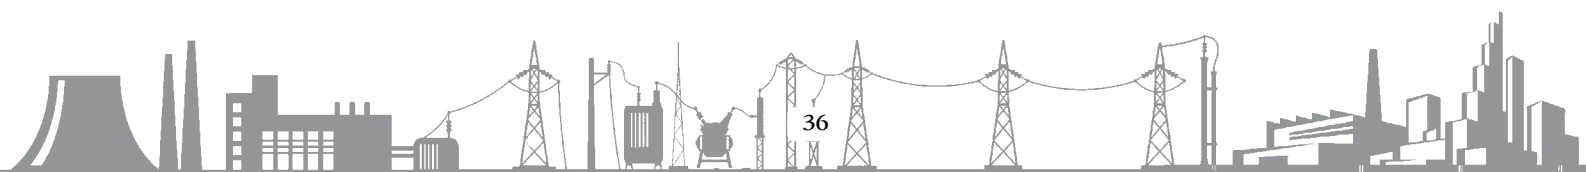



ALL ALUMINUM CONDUCTOR STEEL REINFORCED (ACSR) - ASTM B 232/B 232M-99


Code Name /Conductor Size	Sectional Area	Stranding		Wire diameter		Diameter of Complete Conductor	Conductor Weight	Rated Strength	DC Resistance @ 20°C	Current Capacity	
		No. of Wires								@ 75°C	@ 85°C
		AL	Steel	AL	Steel						
(kcmil)	(mm²)	(No.)	(No.)	(mm)	(mm)	(mm)	(Kg/km)	KN	(Ω/Km)	(Ampere)	(Ampere)
1105.2	560.0	45	7	3.98	2.65	31.83	1854	132.0	0.0516	636	815
986.8	500.0	54	7	3.43	3.43	30.87	1889	154.0	0.0579	600	766
986.8	500.0	45	7	3.76	2.51	30.09	1656	118.0	0.0578	598	762
888.1	450.0	54	7	3.26	3.26	29.34	1706	139.0	0.0641	567	721
888.1	450.0	45	7	3.57	2.38	28.56	1492	108.0	0.0641	565	717
789.4	400.0	30	19	4.12	2.47	28.83	1824	170.0	0.0724	540	686
789.4	400.0	26	7	4.43	3.45	28.07	1622	139.0	0.0721	539	684
789.4	400.0	24	7	4.61	3.07	28.07	1515	123.0	0.0721	539	683
700.6	355.0	30	19	3.88	2.33	27.17	1620	151.0	0.0816	505	639
700.6	355.0	26	7	4.17	3.24	26.40	1435	123.0	0.0813	504	636
700.6	355.0	24	7	4.34	2.89	26.03	1343	111.0	0.0813	503	634
621.7	315.0	30	19	3.66	2.20	25.64	1443	138.0	0.0917	473	596
621.7	315.0	26	7	3.93	3.06	24.90	1277	110.0	0.0916	471	593
621.7	315.0	24	7	4.09	2.73	24.55	1194	98.7	0.0916	470	591
621.7	315.0	18	1	4.72	4.72	23.60	1014	68.0	0.0912	468	587
552.6	280.0	30	7	3.45	3.45	24.15	1291	122.0	0.1032	442	555
552.6	280.0	26	7	3.70	2.88	23.44	1131	100.0	0.1033	440	551





ALL ALUMINUM CONDUCTOR STEEL REINFORCED (ACSR) - ASTM B 232/B 232M-99

Code Name /Conductor Size	Sectional Area	Stranding		Wire diameter		Diameter of Complete Conductor	Conductor Weight	Rated Strength	DC Resistance @ 20°C	Current Capacity	
		No. of Wires								@ 75°C	@ 85°C
		AL	Steel	AL	Steel					@ 75°C	@ 85°C
(kcmil)	(mm²)	(No.)	(No.)	(mm)	(mm)	(mm)	(Kg/km)	KN	(Ω/Km)	(Ampere)	(Ampere)
552.6	280	24	7	3.85	2.57	23.11	1058	87.5	0.1034	439	549
552.6	280	18	1	4.45	4.45	22.25	901	60.4	0.1026	438	547
493.4	250	30	7	3.26	3.26	22.82	1152	109.0	0.1156	415	519
493.4	250	26	7	3.50	2.72	22.16	1011	89.5	0.1154	413	516
493.4	250	24	7	3.64	2.43	21.85	946	79.4	0.1156	412	514
493.4	250	18	1	4.21	4.21	21.05	806	54.1	0.1147	411	512
442.1	224	30	7	3.08	3.08	21.56	1029	97.4	0.1295	389	484
442.1	224	26	7	3.31	2.57	20.95	904	80.0	0.1291	388	482
442.1	224	24	7	3.45	2.30	20.70	849	72.0	0.1287	387	482
442.1	224	18	1	3.98	3.98	19.90	721	48.3	0.1283	386	478
394.7	200	30	7	2.91	2.91	20.37	918	89.7	0.1451	364	452
394.7	200	26	7	3.13	2.43	19.81	808	71.5	0.1443	364	451
394.7	200	24	7	3.26	2.17	19.55	758	64.2	0.1442	363	450
394.7	200	18	1	3.76	3.76	18.80	643	43.1	0.1438	361	447
355.2	180	30	7	2.76	2.76	19.32	826	80.7	0.1613	343	424
355.2	180	26	7	2.97	2.31	18.81	729	65.4	0.1603	342	423
355.2	180	24	7	3.09	2.06	18.54	681	57.8	0.1604	341	422

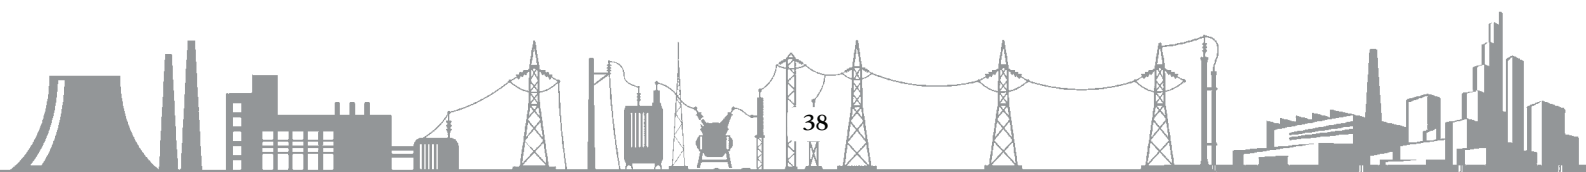



ALL ALUMINUM CONDUCTOR STEEL REINFORCED (ACSR) - ASTM B 232/B 232M-99

Code Name /Conductor Size	Sectional Area	Stranding		Wire diameter		Diameter of Complete Conductor	Conductor Weight	Rated Strength	DC Resistance @ 20°C	Current Capacity	
		No. of Wires								@ 75°C	@ 85°C
		AL	Steel	AL	Steel					@ 75°C	@ 85°C
(kcmil)	(mm ²)	(No.)	(No.)	(mm)	(mm)	(mm)	(Kg/km)	KN	(Ω/Km)	(Ampere)	(Ampere)
355.2	180	18	1	3.57	3.57	17.85	580	40.4	0.1595	340	419
315.8	160	30	7	2.61	2.61	18.27	739	72.9	0.1804	321	397
315.8	160	26	7	2.80	2.18	17.74	648	58.9	0.1804	320	394
315.8	160	24	7	2.91	1.94	17.46	604	52.0	0.1809	318	392
315.8	160	18	1	3.36	3.36	16.80	514	35.8	0.1800	317	390
276.3	140	26	7	2.62	2.04	16.60	567	52.2	0.2060	296	364
276.3	140	24	7	2.73	1.82	16.38	532	46.4	0.2056	296	363
276.3	140	18	1	3.15	3.15	15.75	452	31.5	0.2049	294	361
246.7	125	26	7	2.47	1.92	15.64	504	46.9	0.2318	276	339
246.7	125	24	7	2.58	1.72	15.48	475	41.5	0.2301	277	339
246.7	125	18	1	2.97	2.97	14.85	401	28.8	0.2304	275	336
197.4	100	16	19	2.82	2.44	17.84	972	123.0	0.2890	236	291
197.4	100	12	7	3.26	3.26	16.30	734	85.9	0.2883	233	286
197.4	100	6	1	4.61	4.61	13.83	405	34.6	0.2855	228	277
177.6	90	12	7	3.09	3.09	15.45	660	77.2	0.3209	219	268
157.9	80	12	7	2.91	2.91	14.55	585	70.6	0.3618	204	249
157.9	80	6	1	4.12	4.12	12.36	323	27.6	0.3575	200	242





ALL ALUMINUM CONDUCTOR STEEL REINFORCED (ACSR) - ASTM B 232/B 232M-99

Code Name /Conductor Size	Sectional Area	Stranding		Wire diameter		Diameter of Complete Conductor	Conductor Weight	Rated Strength	DC Resistance @ 20°C	Current Capacity	
		No. of Wires								@ 75°C	@ 85°C
		AL	Steel	AL	Steel					@ 75°C	@ 85°C
(kcmil)	(mm²)	(No.)	(No.)	(mm)	(mm)	(mm)	(Kg/km)	KN	(Ω/Km)	(Ampere)	(Ampere)
140.1	71.0	12	7	2.74	2.74	13.70	519	62.9	0.4081	190	232
124.3	63.0	12	7	2.59	2.59	12.95	463	56.2	0.4567	178	216
124.3	63.0	6	1	3.66	3.66	10.98	255	22.1	0.4530	174	210
110.5	56.0	12	7	2.44	2.44	12.20	411	50.2	0.5146	166	201
98.7	50.0	12	7	2.30	2.30	11.50	365	45.4	0.5792	155	187
98.7	50.0	6	1	3.26	3.26	9.78	202	18.1	0.5710	151	182
78.9	40.0	8	1	2.52	4.20	9.24	218	22.5	0.7202	133	160
78.9	40.0	6	1	2.91	2.91	8.73	161	14.9	0.7166	132	158
62.2	31.5	7	1	2.39	3.19	7.97	148	15.1	0.9105	115	138
62.2	31.5	6	1	2.59	2.59	7.77	128	11.9	0.9046	115	137
49.3	25.0	7	1	2.13	2.84	7.10	118	12.3	1.1464	100	120
49.3	25.0	6	1	2.30	2.30	6.90	101	9.5	1.1471	100	119
39.5	20.0	7	1	1.91	2.55	6.37	95	10.0	1.4257	88	105
39.5	20.0	6	1	2.06	2.06	6.18	81	7.8	1.4299	88	104
31.6	16.0	6	1	1.84	1.84	5.52	64	6.3	1.7923	76	90
24.7	12.5	6	1	1.63	1.63	4.89	51	5.0	2.2838	66	78





ALL ALUMINUM CONDUCTOR STEEL REINFORCED (ACSR) - ASTM B 232/B 232M-99

Code Name /Conductor Size	Sectional Area	Stranding		Wire diameter		Diameter of Complete Conductor	Conductor Weight	Rated Strength	DC Resistance @ 20°C	Current Capacity	
		No. of Wires								@ 75°C	@ 85°C
		AL	Steel	AL	Steel					@ 75°C	@ 85°C
(kcmil)	(mm²)	(No.)	(No.)	(mm)	(mm)	(mm)	(Kg/km)	KN	(Ω/Km)	(Ampere)	(Ampere)
10/1.8	10.6/1.77	6	1	1.50	1.50	4.50	43	4.1	2.7064	60	70
16/2.7	16/2.69	6	1	1.85	1.85	5.60	65	6.2	1.7818	77	91
25/4.2	24.9/4.15	6	1	2.30	2.30	6.90	100	9.3	1.1521	100	119
35/6.2	36.9/6.15	6	1	2.80	2.80	8.40	148	13.5	0.7774	126	151
40/6.7	40/6.7	6	1	2.91	2.91	8.74	161	14.4	0.7172	132	158
50/8.0	48.2/8.04	6	1	3.20	3.20	9.60	195	17.1	0.5951	148	178
63/10.5	63/10.5	6	1	3.66	3.66	10.97	254	21.6	0.4553	173	209
70/11	68/11.3	6	1	3.80	3.80	11.40	276	24.1	0.4218	181	219
70/72	68.4 /72.2	18	19	2.20	2.20	15.40	755	96.8	0.4194	191	234
95/16	95.4/15.9	6	1	4.50	4.50	13.50	385	33.4	0.3007	221	269
95/141	91.2/141	24	37	2.20	2.20	19.80	1357	180.8	0.3146	230	285
100/16.7	100/16.7	6	1	4.61	4.61	13.82	403	34.3	0.2868	227	277
120/19	118/18.8	26	7	2.40	1.85	15.20	471	41.5	0.2440	268	328
120/27	114/26.6	30	7	2.20	2.20	15.40	528	49.5	0.2531	264	323
125/6.9	125/6.9	18	1	2.97	2.97	14.85	398	29.2	0.2304	275	336
125/20.4	125/20.4	26	7	2.47	1.92	15.67	504	45.7	0.2308	277	339
150/19	148/18.8	24	7	2.80	1.85	16.80	554	46.3	0.2046	298	366

